



| Company name | |
|---------------------|-----------|
| Reference number | |
| Part | LMA525-LO |
| Manufacturer | WOSP |
| Nominal current [A] | 120 |


Test results table

| Parameter | Value | Reference |
|---------------------------|----------|-----------|
| Output at low revolutions | 86 A | |
| Maximum output power | 1904 W | |
| Max output current | 140 A | |
| Ripple | 8 A | |
| Leakage | 0 | |
| Maximum efficiency | 49 % | |
| Initial voltage | 13.3 V | |
| Direction | CW | |
| Turn on speed | 1438 rpm | |
| Motor power | 3.9 kW | |
| Torque | 10.1 Nm | |
| Rated voltage | 12 V | |
| Output Voltage Tested | 13.6 V | |
| Number of reached levels | 7 | |
| Charge lamp voltage | 0.2 V | |
| Status light RPM | 298 rpm | |
| VSP @2,500 | 14.5 V | |
| VSP @4,250 | 14.4 V | |
| VSP @6,000 | 14.4 V | |
| Duration of the procedure | 49.3 s | |
| Three-phase voltage | 409 V | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

Connection definition

| Parameter | Value | Reference |
|-------------------|-------|-----------|
| Alternator system | Lamp | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

Activity chart

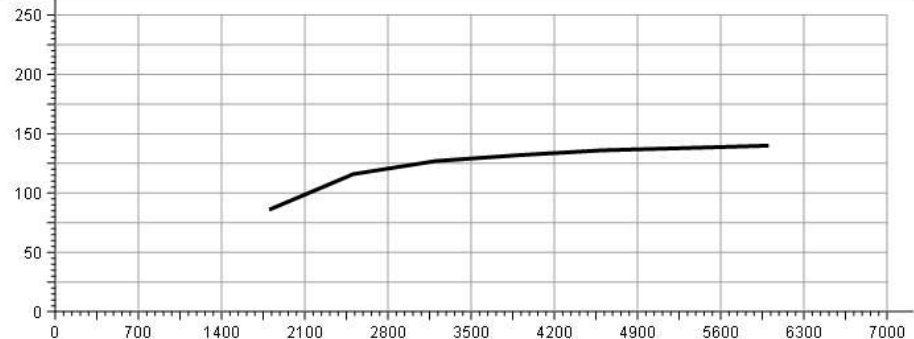

Data

| [RPM] | Current [A] | Reference [A] |
|-------|-------------|---------------|
| 6003 | 140 | |
| 5302 | 138 | |
| 4597 | 136 | |
| 3902 | 132 | |
| 3200 | 127 | |
| 2508 | 116 | |
| 1800 | 86 | |

| ADDRESS | WEB | E-MAIL | PHONE |
|---------|-----|--------|-------|
| | | | |