



| Company name | |
|---------------------|--------|
| Reference number | |
| Part | LMA653 |
| Manufacturer | WOSP |
| Nominal current [A] | 70 |

PASS


Test results table

| Parameter | Value | Reference |
|---------------------------|----------|-----------|
| Output at low revolutions | 43 A | |
| Maximum output power | 1014 W | |
| Max output current | 74 A | |
| Ripple | 2 A | |
| Leakage | 0 | |
| Maximum efficiency | 34 % | |
| Initial voltage | 13.3 V | |
| Direction | | |
| Turn on speed | 1603 rpm | |
| Motor power | 3 kW | |
| Torque | 8 Nm | |
| Rated voltage | | |
| Output Voltage Tested | 13.6 V | |
| Number of reached levels | 7 | |
| Charge lamp voltage | 1.4 V | |
| Status light RPM | 298 rpm | |
| VSP @2,500 | 14.6 V | |
| VSP @4,250 | 14.6 V | |
| VSP @6,000 | 14.6 V | |
| Duration of the procedure | 51.1 s | |
| Three-phase voltage | 412.8 V | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

Connection definition

| Parameter | Value | Reference |
|-------------------|-------|-----------|
| Alternator system | Lamp | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

Activity chart

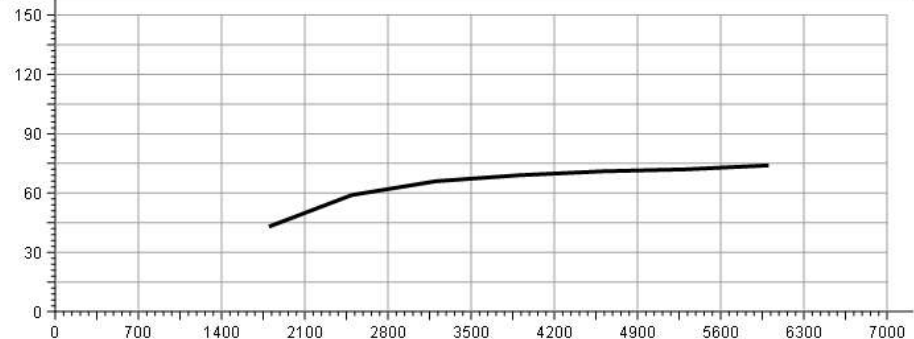

Data

| [RPM] | Current [A] | Reference [A] |
|-------|-------------|---------------|
| 6003 | 74 | |
| 5305 | 72 | |
| 4603 | 71 | |
| 3898 | 69 | |
| 3203 | 66 | |
| 2495 | 59 | |
| 1797 | 43 | |

| ADDRESS | WEB | E-MAIL | PHONE |
|---------|-----|--------|-------|
| | | | |