



Company name	WOSPerformance
Reference number	
Part	LMA606-LO
Manufacturer	WOSP
Nominal current [A]	120A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	90 A	
Maximum output power	1712 W	
Max output current	125 A	
Ripple	2 A	
Leakage	<5mA	
Maximum efficiency	44 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1519 rpm	
Motor power	3.9 kW	
Torque	9.1 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	15.2 V	
VSP @4,250	15.1 V	
VSP @6,000	15.1 V	
Duration of the procedure	61.8 s	
Three-phase voltage	411.2 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

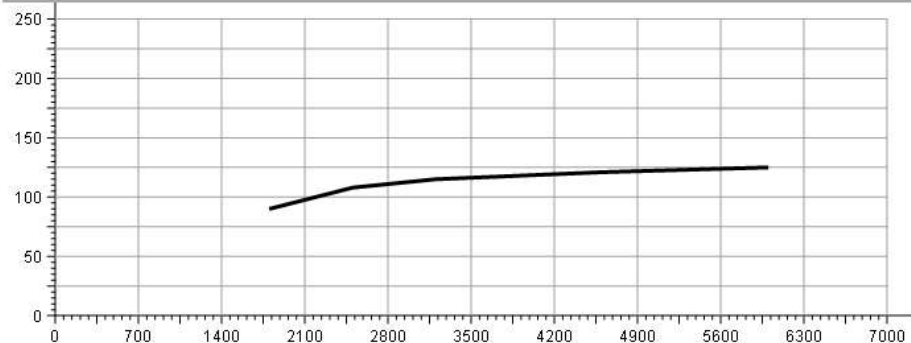

Data

[RPM]	Current [A]	Reference [A]
6000	125	
5301	123	
4600	121	
3896	118	
3197	115	
2504	108	
1800	90	