



Company name	
Reference number	
Part	LMA003
Manufacturer	Wood Auto
Nominal current [A]	115


### Test results table

Parameter	Value	Reference
Output at low revolutions	61 A	61 A
Maximum output power	1506 W	1506 W
Max output current	115 A	115 A
Ripple	2 A	2 A
Leakage	0	<5mA
Maximum efficiency	42 %	42 %
Initial voltage	13.2 V	13.2 V
Direction	CCW	CCW
Turn on speed	1324 rpm	1324 rpm
Motor power	3.6 kW	4 kW
Torque	10.7 Nm	10.7Nm
Rated voltage	12 V	12 V
Output Voltage Tested	13.2 V	13.2 V
Number of reached levels	5	5
Charge lamp voltage	0.7 V	0.7 V
Status light RPM	287 rpm	287 rpm
VSP @2,500	14.7 V	14.7 V
VSP @4,250	14.8 V	14.8 V
VSP @6,000	14.8 V	14.8 V
Duration of the procedure	42.5 s	42.5 s
Three-phase voltage	414.4 V	

### Connection definition

Parameter	Value	Reference
Alternator system	Lamp	Lamp

### Activity chart

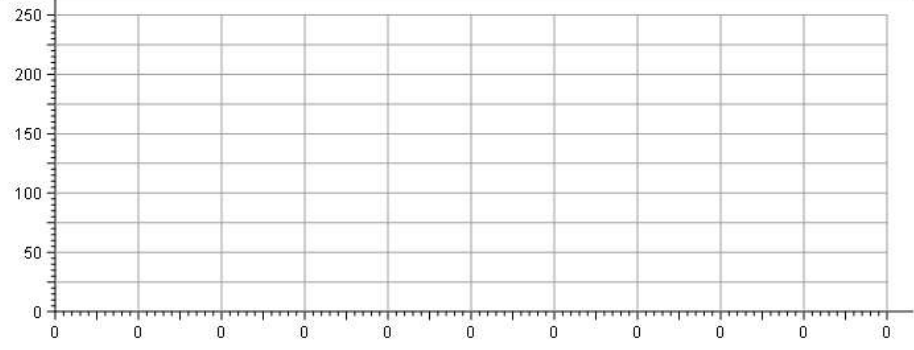

### Data

[RPM]	Current [A]	Reference [A]
		115
		112
		107
		96
		61

ADDRESS	WEB	E-MAIL	PHONE