



Company name	WOSPerformance
Reference number	
Part	LMA004
Manufacturer	WOSP
Nominal current [A]	80A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	59 A	
Maximum output power	1293 W	
Max output current	101 A	
Ripple	3 A	
Leakage	<5mA	
Maximum efficiency	36 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1063 rpm	
Motor power	3.6 kW	
Torque	9.3 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.9 V	
Status light RPM	292 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.3 V	
VSP @6,000	14.3 V	
Duration of the procedure	42.5 s	
Three-phase voltage	405 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

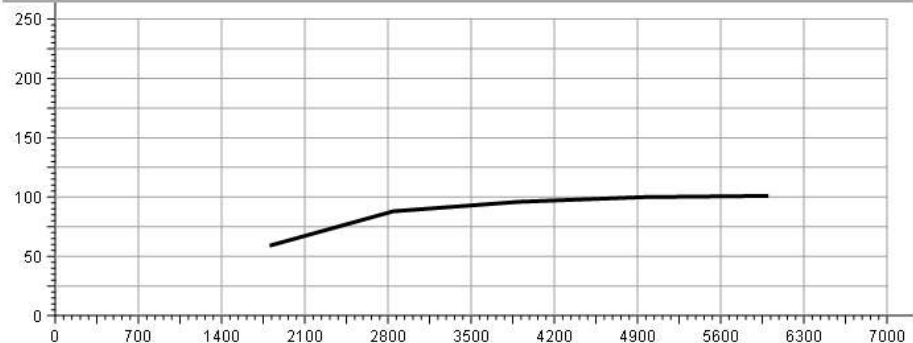

Data

[RPM]	Current [A]	Reference [A]
6000	101	
4952	100	
3902	96	
2844	88	
1803	59	