



Company name	WOSPerformance
Reference number	
Part	LMA010
Manufacturer	WOSP
Nominal current [A]	120A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	84 A	
Maximum output power	1766 W	
Max output current	138 A	
Ripple	4 A	
Leakage	<5mA	
Maximum efficiency	42 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1030 rpm	
Motor power	4.2 kW	
Torque	12.7 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	3.6 V	
Status light RPM	294 rpm	
VSP @2,500	14.7 V	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	45.7 s	
Three-phase voltage	406.4 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

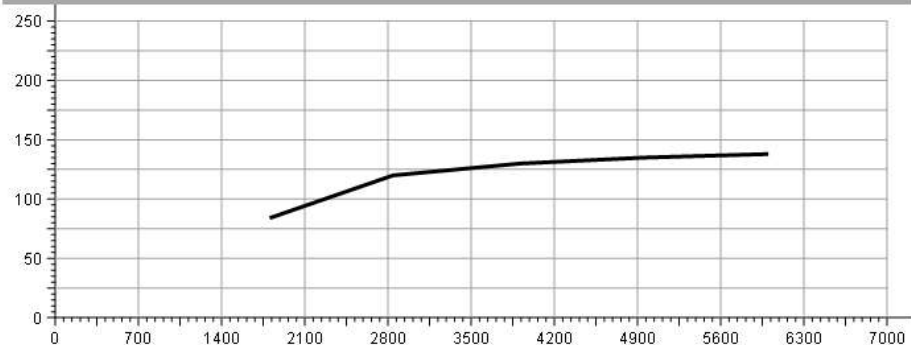

Data

[RPM]	Current [A]	Reference [A]
6000	138	
4955	135	
3913	130	
2842	120	
1804	84	