

Company name	WOSPerformance
Reference number	
Part	LMA011AC-80-S1
Manufacturer	WOSP
Nominal current [A]	80A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	28 A	
Maximum output power	998 W	
Max output current	78 A	
Ripple	3 A	
Leakage	<5mA	
Maximum efficiency	33 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	1817 rpm	
Motor power	3 kW	
Torque	8.3 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	1.5 V	
Status light RPM	293 rpm	
VSP @2,500	14.5 V	
VSP @4,250	14.5 V	
VSP @6,000	14.6 V	
Duration of the procedure	44.4 s	
Three-phase voltage	409.5 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

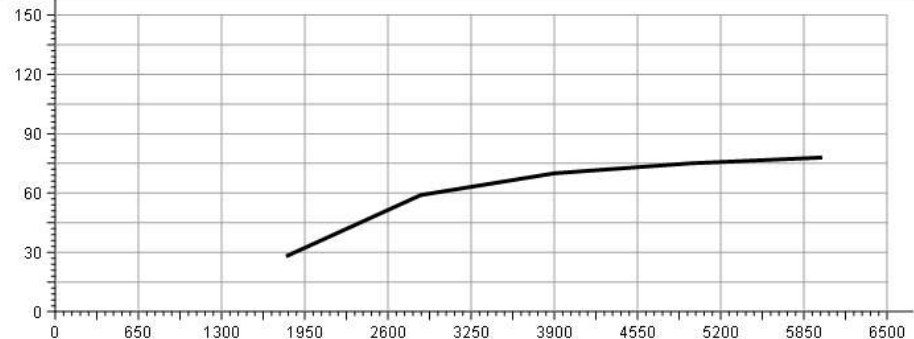

Data

[RPM]	Current [A]	Reference [A]
5993	78	
4950	75	
3900	70	
2857	59	
1803	28	