



Company name	WOSPerformance
Reference number	
Part	LMA011AC-80
Manufacturer	WOSP
Nominal current [A]	

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	41 A	
Maximum output power	1024 W	
Max output current	80 A	
Ripple	1 A	
Leakage	<5mA	
Maximum efficiency	35 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	1651 rpm	
Motor power	2.9 kW	
Torque	7.6 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	1.4 V	
Status light RPM	302 rpm	
VSP @2,500	14.5 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	44 s	
Three-phase voltage	408.3 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

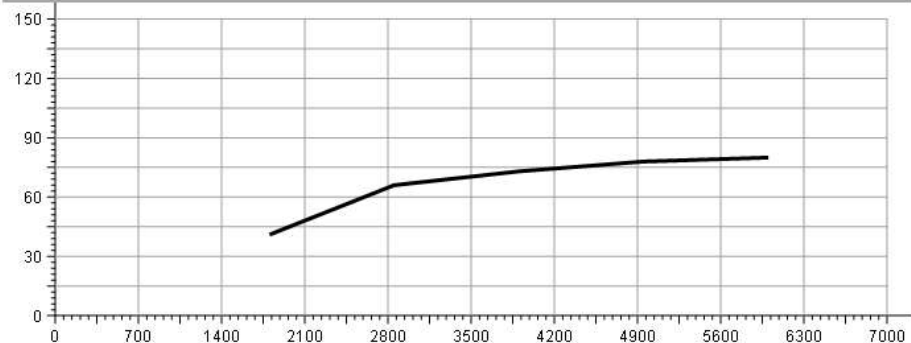

Data

[RPM]	Current [A]	Reference [A]
6000	80	
4952	78	
3902	73	
2851	66	
1803	41	