



Company name	WOSPerformance
Reference number	
Part	LMA012-80-S2
Manufacturer	WOSP
Nominal current [A]	80A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	36 A	
Maximum output power	1024 W	
Max output current	80 A	
Ripple	1 A	
Leakage	<5mA	
Maximum efficiency	35 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1819 rpm	
Motor power	2.9 kW	
Torque	7.7 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	1.4 V	
Status light RPM	295 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	41.8 s	
Three-phase voltage	404.8 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

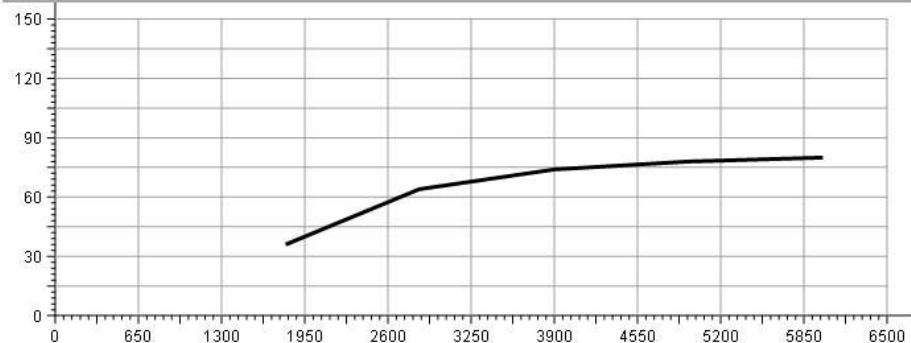

Data

[RPM]	Current [A]	Reference [A]
5997	80	
4946	78	
3902	74	
2844	64	
1800	36	