



Company name	WOSPerformance
Reference number	
Part	LMA012-80
Manufacturer	WOSP
Nominal current [A]	80A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	37 A	
Maximum output power	1024 W	
Max output current	80 A	
Ripple	4 A	
Leakage	<5mA	
Maximum efficiency	34 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1810 rpm	
Motor power	3 kW	
Torque	7.8 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	1.6 V	
Status light RPM	279 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	41.8 s	
Three-phase voltage	405.4 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

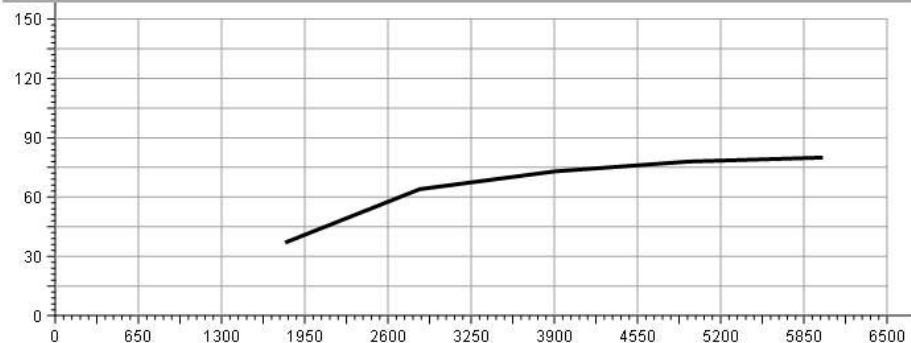

Data

[RPM]	Current [A]	Reference [A]
5997	80	
4952	78	
3905	73	
2848	64	
1797	37	