

Company name	WOSPerformance
Reference number	
Part	LMA021
Manufacturer	WOSP
Nominal current [A]	100A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	50 A	
Maximum output power	1408 W	
Max output current	110 A	
Ripple	6 A	
Leakage	<5mA	
Maximum efficiency	39 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1134 rpm	
Motor power	3.6 kW	
Torque	9.4 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.9 V	
Status light RPM	294 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.3 V	
VSP @6,000	14.3 V	
Duration of the procedure	46.3 s	
Three-phase voltage	405.5 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

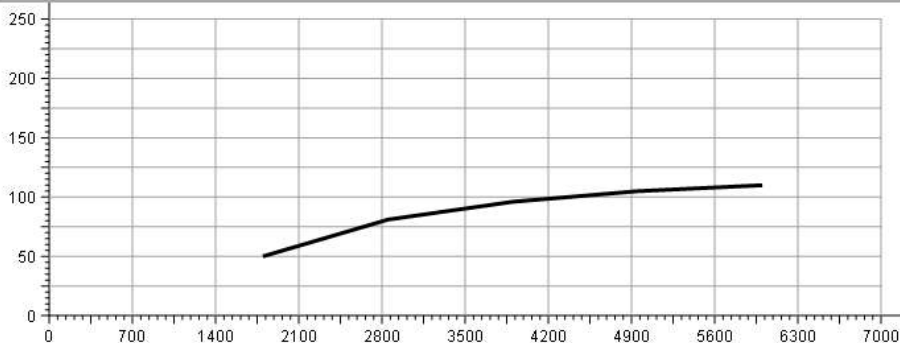

Data

[RPM]	Current [A]	Reference [A]
6000	110	
4953	105	
3897	96	
2850	81	
1797	50	

ADDRESS

UK / USA

WEB

www.wosperformance.com

E-MAIL

UK: info@wosperformance.co.uk

PHONE

USA: info@wosperformance.com