




Company name	WOSPerformance
Reference number	
Part	LMA043
Manufacturer	WOSP
Nominal current [A]	70A

PASS

Test results table		
Parameter	Value	Reference
Output at low revolutions	34 A	
Maximum output power	1024 W	
Max output current	80 A	
Ripple	1 A	
Leakage	<5mA	
Maximum efficiency	34 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1753 rpm	
Motor power	3 kW	
Torque	7 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	1.4 V	
Status light RPM	279 rpm	
VSP @2,500	14.6 V	
VSP @4,250	14.6 V	
VSP @6,000	14.6 V	
Duration of the procedure	44.9 s	
Three-phase voltage	404.4 V	

Connection definition		
Parameter	Value	Reference
Alternator system	Lamp	

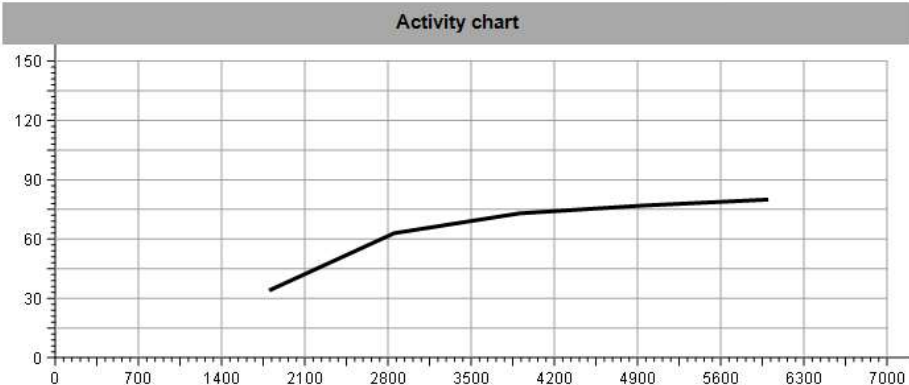

Data		
[RPM]	Current [A]	Reference [A]
6000	80	
4953	77	
3907	73	
2852	63	
1800	34	