

Company name	WOSPerformance
Reference number	LMA046-HO-SE
Part	
Manufacturer	WOSP
Nominal current [A]	100A


Test results table

Parameter	Value	Reference
Output at low revolutions	57 A	
Maximum output power	1254 W	
Max output current	98 A	
Ripple	3 A	
Leakage	<5mA	
Maximum efficiency	39 %	
Initial voltage	13.2 V	
Direction	CW	
Turn on speed	1841 rpm	
Motor power	3.2 kW	
Torque	7.8 Nm	
Rated voltage	12 V	
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	14.8 V	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	42.5 s	
Three-phase voltage	411.2 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

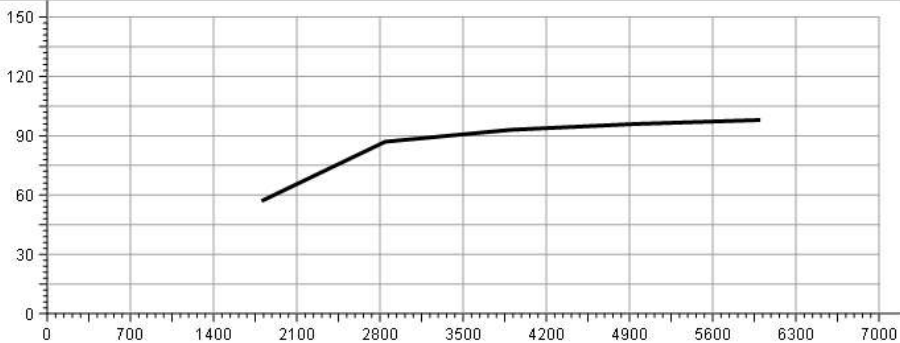

Data

[RPM]	Current [A]	Reference [A]
6000	98	
4951	96	
3901	93	
2843	87	
1803	57	

ADDRESS

UK / USA

WEB

www.wosperformance.com

E-MAIL

UK: info@wosperformance.co.uk

PHONE

USA: info@wosperformance.com