

Company name	
Reference number	
Part	LMA062
Manufacturer	WOSP
Nominal current [A]	80

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	24 A	
Maximum output power	1041 W	
Max output current	76 A	
Ripple	1 A	
Leakage	0	
Maximum efficiency	36 %	
Initial voltage	13.4 V	
Direction		
Turn on speed	1811 rpm	
Motor power	2.9 kW	
Torque	7 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	1.4 V	
Status light RPM	286 rpm	
VSP @2,500	14.5 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	45.5 s	
Three-phase voltage	407.8 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

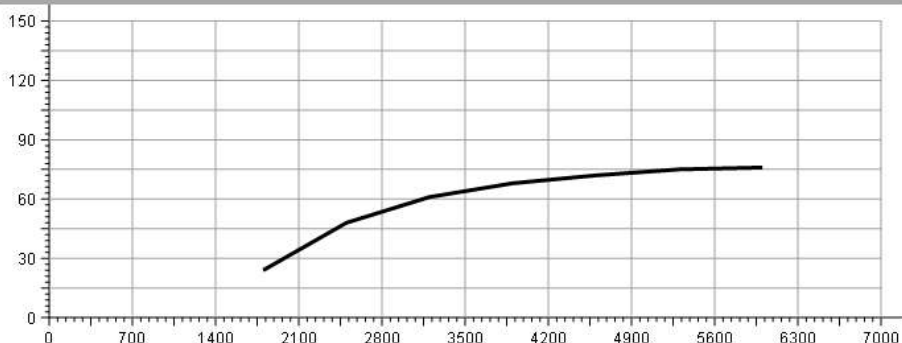

Data

[RPM]	Current [A]	Reference [A]
6000	76	
5300	75	
4603	72	
3900	68	
3197	61	
2500	48	
1800	24	

ADDRESS

WEB

E-MAIL

PHONE