MOTOPLAT CV

CV-623

17.04.2024 08:51:25

Company name	
Reference number	
Part	LMA069
Manufacturer	WOSP
Nominal current [A]	80

Test results table

Parameter	Value	Reference
Output at low revolutions	38 A	
Maximum output power	1104 W	
Max output current	80 A	
Ripple	3 A	
Leakage	0	
Maximum efficiency	33 %	
Initial voltage	13.4 V	
Direction	CW	
Turn on speed	1540 rpm	
Motor power	3.3 kW	
Torque	8.8 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	5	
Charge lamp voltage	1.5 V	
Status light RPM	295 rpm	
VSP @2,500	14.6 V	
VSP @4,250	14.6 V	
VSP @6,000	14.6 V	
Duration of the procedure	43.9 s	
Three-phase voltage	406.7 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

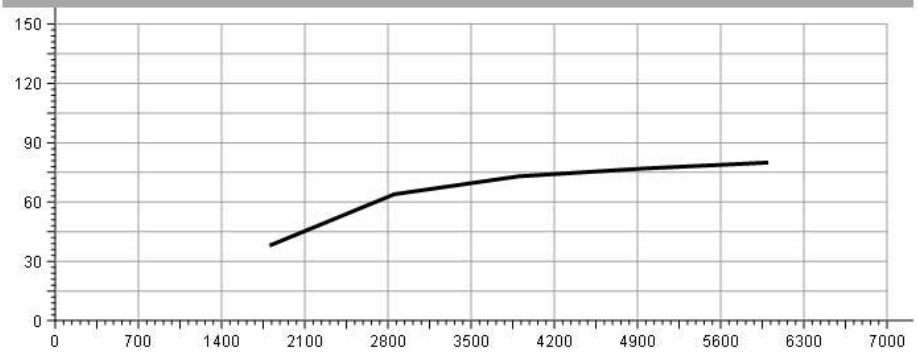

Data

[RPM]	Current [A]	Reference [A]
6000	80	
4949	77	
3898	73	
2854	64	
1803	38	

ADDRESS	WEB	E-MAIL	PHONE