



Company name	
Reference number	
Part	LMA071
Manufacturer	WOSP
Nominal current [A]	90


### Test results table

Parameter	Value	Reference
Output at low revolutions	45 A	
Maximum output power	1215 W	
Max output current	90 A	
Ripple	1 A	
Leakage	0	
Maximum efficiency	40 %	
Initial voltage	13.4 V	
Direction	CW	
Turn on speed	1100 rpm	
Motor power	3 kW	
Torque	8.4 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.8 V	
Status light RPM	293 rpm	
VSP @2,500	14.3 V	
VSP @4,250	14.3 V	
VSP @6,000	14.3 V	
Duration of the procedure	47.8 s	
Three-phase voltage	412.8 V	

### Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

### Activity chart

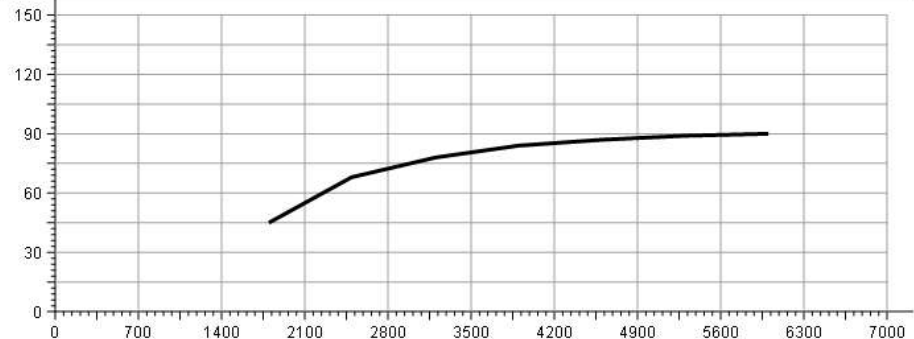

### Data

[RPM]	Current [A]	Reference [A]
6000	90	
5300	89	
4607	87	
3897	84	
3200	78	
2493	68	
1797	45	

ADDRESS	WEB	E-MAIL	PHONE