



Company name	WOSPerformance
Reference number	
Part	LMA074-SE
Manufacturer	WOSP
Nominal current [A]	140A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	83 A	
Maximum output power	1907 W	
Max output current	149 A	
Ripple	4 A	
Leakage	<5mA	
Maximum efficiency	42 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	973 rpm	
Motor power	4.5 kW	
Torque	12.1 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	15 V	
VSP @4,250	15 V	
VSP @6,000	15 V	
Duration of the procedure	45.1 s	
Three-phase voltage	407.8 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

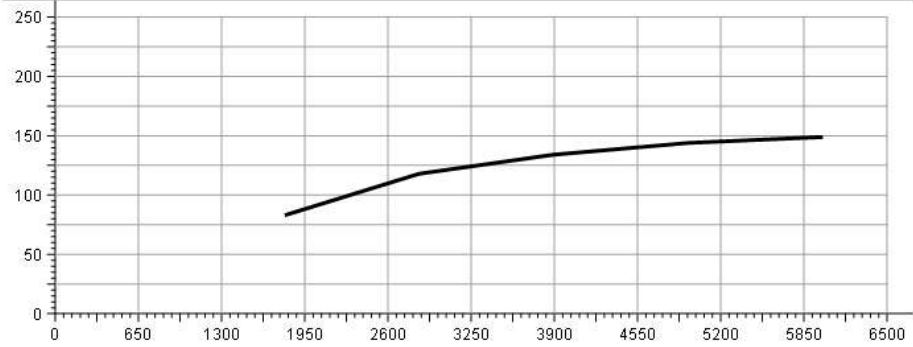

Data

[RPM]	Current [A]	Reference [A]
5997	149	
4950	144	
3890	134	
2843	118	
1793	83	