

Company name	WOSPerformance
Reference number	
Part	LMA076
Manufacturer	WOSP
Nominal current [A]	70A

**PASS**


### Test results table

Parameter	Value	Reference
Output at low revolutions	38 A	
Maximum output power	1037 W	
Max output current	81 A	
Ripple	3 A	
Leakage	<5mA	
Maximum efficiency	35 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1622 rpm	
Motor power	3 kW	
Torque	7.9 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	1.5 V	
Status light RPM	300 rpm	
VSP @2,500	14.5 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	42.7 s	
Three-phase voltage	406.2 V	

### Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

### Activity chart

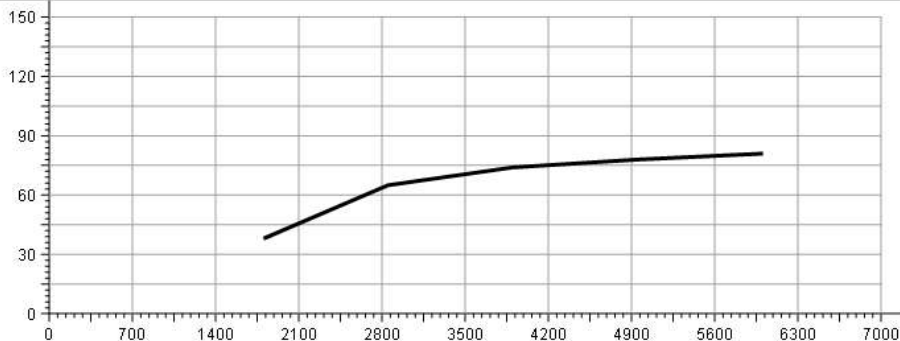

### Data

[RPM]	Current [A]	Reference [A]
6006	81	
4953	78	
3900	74	
2850	65	
1803	38	

ADDRESS

UK / USA

WEB

[www.wosperformance.com](http://www.wosperformance.com)

E-MAIL

UK: [info@wosperformance.co.uk](mailto:info@wosperformance.co.uk)

PHONE

USA: [info@wosperformance.com](mailto:info@wosperformance.com)