


Company name	WOSPerformance
Reference number	
Part	LMA201-C
Manufacturer	WOSP
Nominal current [A]	140A

PASS

Test results table		
Parameter	Value	Reference
Output at low revolutions	85 A	
Maximum output power	2180 W	
Max output current	169 A	
Ripple	6 A	
Leakage	<5mA	
Maximum efficiency	45 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	1098 rpm	
Motor power	4.8 kW	
Torque	12.7 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.7 V	
Status light RPM	305 rpm	
VSP @2,500	14.2 V	
VSP @4,250	14.2 V	
VSP @6,000	14.2 V	
Duration of the procedure	47.9 s	
Three-phase voltage	411 V	

Connection definition		
Parameter	Value	Reference
Alternator system	Lamp	

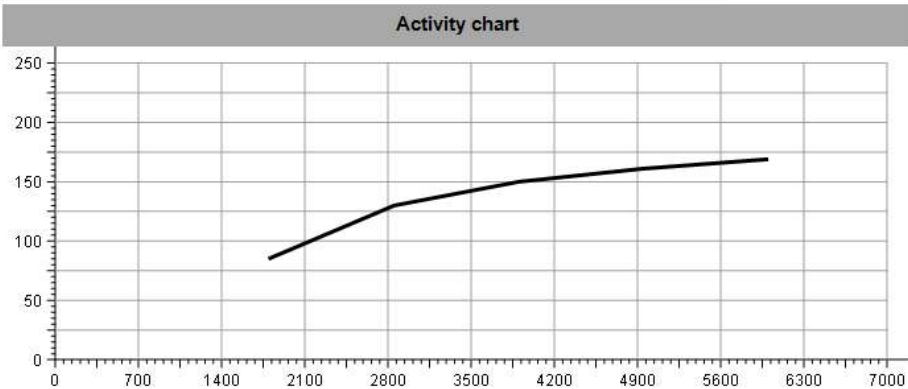

Data		
[RPM]	Current [A]	Reference [A]
6000	169	
4943	161	
3898	150	
2851	130	
1794	85	