



Company name	
Reference number	
Part	LMA222-100
Manufacturer	WOSP
Nominal current [A]	100A

**PASS**


**Test results table**

Parameter	Value	Reference
Output at low revolutions	50 A	
Maximum output power	1711 W	
Max output current	124 A	
Ripple	2 A	
Leakage	0	
Maximum efficiency	46 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1470 rpm	
Motor power	3.7 kW	
Torque	10.3 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	1.4 V	
Status light RPM	287 rpm	
VSP @2,500	14.5 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	51.3 s	
Three-phase voltage	412.3 V	

**Connection definition**

Parameter	Value	Reference
Alternator system	Lamp	

**Activity chart**

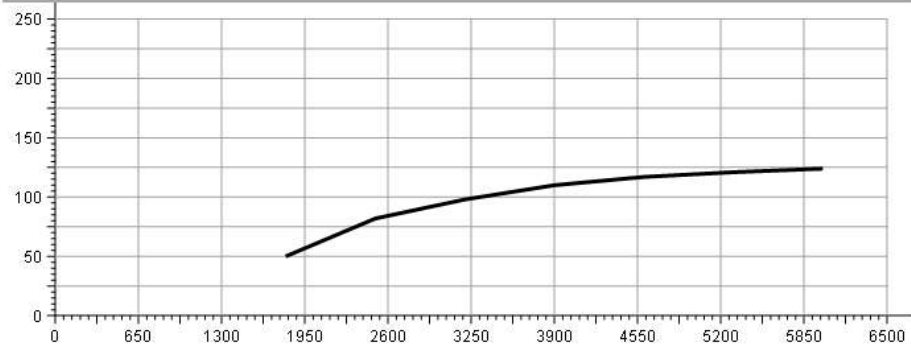

**Data**

[RPM]	Current [A]	Reference [A]
5997	124	
5300	121	
4603	117	
3900	110	
3200	98	
2503	82	
1800	50	

ADDRESS	WEB	E-MAIL	PHONE