



Company name	
Reference number	
Part	LMA222-120
Manufacturer	WOSP
Nominal current [A]	120A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	32 A	
Maximum output power	1973 W	
Max output current	143 A	
Ripple	5 A	
Leakage	0	
Maximum efficiency	48 %	
Initial voltage	13.3 V	
Direction		
Turn on speed	1563 rpm	
Motor power	4.1 kW	
Torque	11.5 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.9 V	
Status light RPM	293 rpm	
VSP @2,500	14.6 V	
VSP @4,250	14.6 V	
VSP @6,000	14.6 V	
Duration of the procedure	51.4 s	
Three-phase voltage	408.8 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

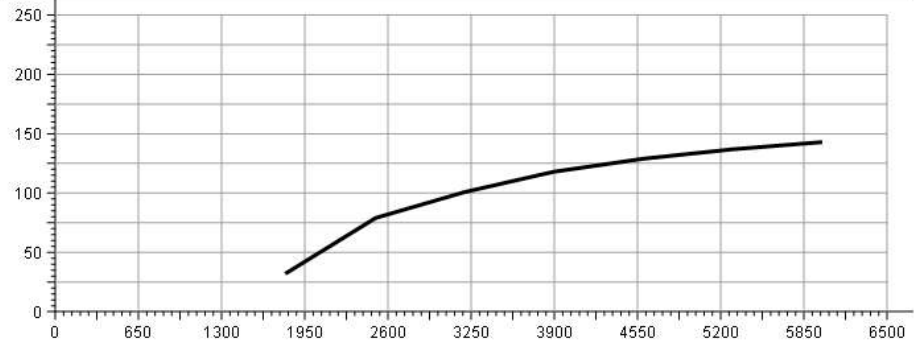

Data

[RPM]	Current [A]	Reference [A]
5993	143	
5300	137	
4597	129	
3897	118	
3203	101	
2503	79	
1797	32	

ADDRESS	WEB	E-MAIL	PHONE