

Company name	
Reference number	
Part	LMA231
Manufacturer	WOSP
Nominal current [A]	65

**PASS**


**Test results table**

Parameter	Value	Reference
Output at low revolutions	25 A	25 A
Maximum output power	849 W	863 W
Max output current	62 A	63 A
Ripple	1 A	1 A
Leakage	0	<5mA
Maximum efficiency	35 %	35 %
Initial voltage	13.3 V	13.2 V
Direction	CW	CW
Turn on speed	1136 rpm	1104 rpm
Motor power	2.4 kW	2 kW
Torque	5.5 Nm	5.5Nm
Rated voltage	12 V	12 V
Output Voltage Tested	13.6 V	13.6 V
Number of reached levels	7	7
Charge lamp voltage	0.7 V	0.7 V
Status light RPM	283 rpm	296 rpm
VSP @2,500	14.4 V	14.4 V
VSP @4,250	14.4 V	14.4 V
VSP @6,000	14.4 V	14.4 V
Duration of the procedure	47.8 s	52.9 s
Three-phase voltage	416.7 V	

**Connection definition**

Parameter	Value	Reference
Alternator system	Lamp	Lamp

**Activity chart**

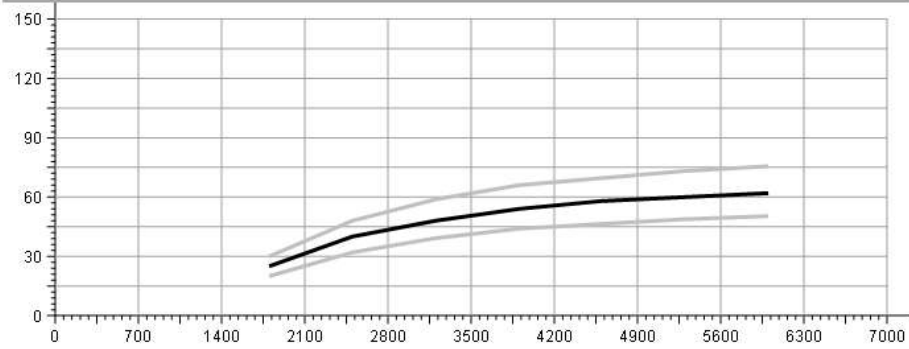

**Data**

[RPM]	Current [A]	Reference [A]
6000	62	63
5296	60	61
4597	58	58
3899	54	55
3197	48	49
2499	40	40
1800	25	25

ADDRESS	WEB	E-MAIL	PHONE