

Company name	WOSPerformance
Reference number	
Part	LMA259
Manufacturer	WOSP
Nominal current [A]	85A

**PASS**


**Test results table**

Parameter	Value	Reference
Output at low revolutions	61 A	
Maximum output power	1344 W	
Max output current	105 A	
Ripple	2 A	
Leakage	<5mA	
Maximum efficiency	38 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	1667 rpm	
Motor power	3.5 kW	
Torque	9.3 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	1.2 V	
Status light RPM	292 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.4 V	
VSP @6,000	14.4 V	
Duration of the procedure	45.4 s	
Three-phase voltage	410.6 V	

**Connection definition**

Parameter	Value	Reference
Alternator system	Lamp	

**Activity chart**

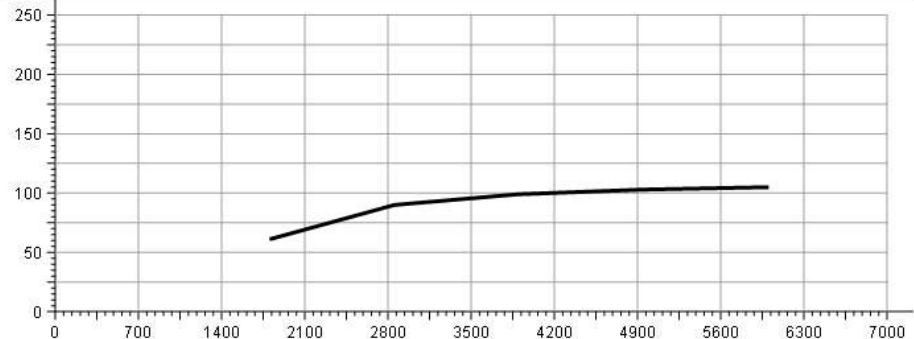

**Data**

[RPM]	Current [A]	Reference [A]
6003	105	
4952	103	
3895	99	
2854	90	
1803	61	