




Company name	WOSPerformance
Reference number	
Part	LMA260-HO (high speed)
Manufacturer	WOSP
Nominal current [A]	170A

Test results table		
Parameter	Value	Reference
Output at low revolutions	144 A	
Maximum output power	2394 W	
Max output current	187 A	
Ripple	3 A	
Leakage	<5mA	
Maximum efficiency	31 %	
Initial voltage	13.1 V	
Direction	CW	
Turn on speed	2880 rpm	
Motor power	7.7 kW	
Torque	12.6 Nm	
Rated voltage	12 V	
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	6.6 V	
Status light RPM	503 rpm	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.4 V	
Duration of the procedure	48.5 s	
Three-phase voltage	412.8 V	

Connection definition		
Parameter	Value	Reference
Alternator system	Lamp	

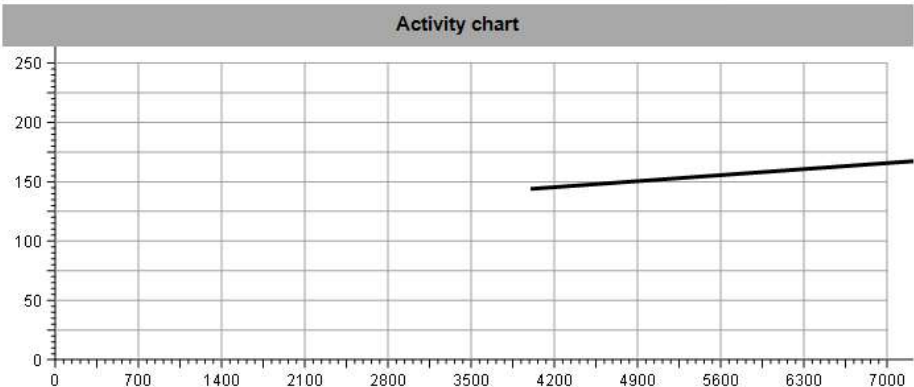

Data		
[RPM]	Current [A]	Reference [A]
18000	187	
14850	185	
11703	182	
8550	177	
4000	144	