

Company name	WOSPerformance
Reference number	
Part	LMA265
Manufacturer	WOSP
Nominal current [A]	50A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	16 A	
Maximum output power	653 W	
Max output current	51 A	
Ripple	2 A	
Leakage	<5mA	
Maximum efficiency	31 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1308 rpm	
Motor power	2.1 kW	
Torque	5.5 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	14.5 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	42 s	
Three-phase voltage	408.9 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

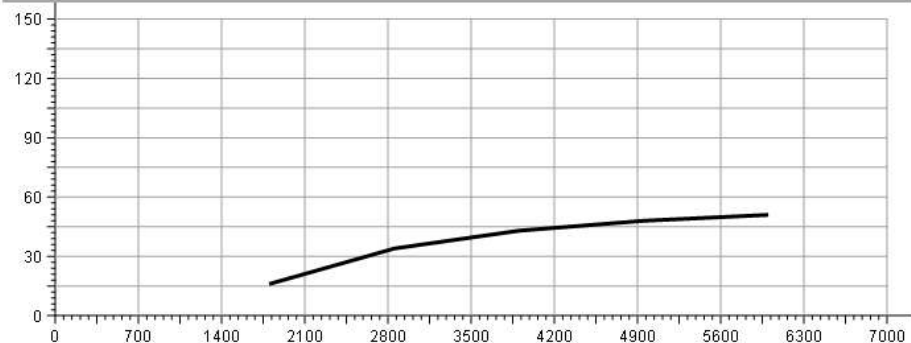

Data

[RPM]	Current [A]	Reference [A]
6000	51	
4949	48	
3902	43	
2854	34	
1800	16	