



Company name	WOSPerformance
Reference number	
Part	LMA270
Manufacturer	WOSP
Nominal current [A]	65A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	33 A	
Maximum output power	819 W	
Max output current	64 A	
Ripple	1 A	
Leakage	<5mA	
Maximum efficiency	34 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	1013 rpm	
Motor power	2.4 kW	
Torque	6.3 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	14.4 V	
VSP @4,250	14.4 V	
VSP @6,000	14.4 V	
Duration of the procedure	44.1 s	
Three-phase voltage	409.5 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

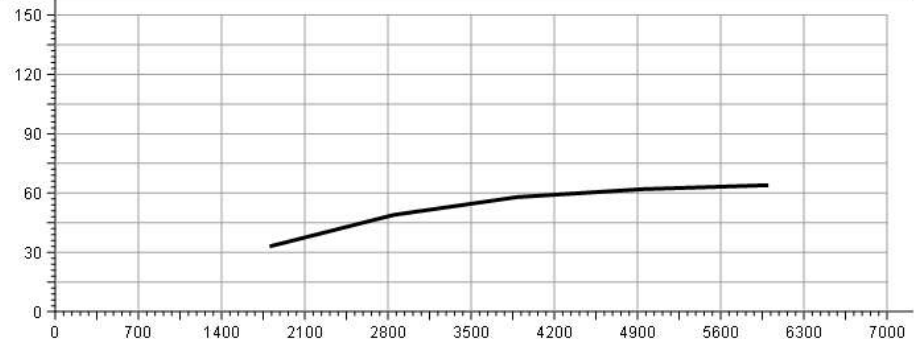

Data

[RPM]	Current [A]	Reference [A]
6000	64	
4949	62	
3892	58	
2851	49	
1803	33	