




Company name	
Reference number	
Part	LMA271-V2
Manufacturer	WOSP
Nominal current [A]	85A

PASS

Test results table		
Parameter	Value	Reference
Output at low revolutions	54 A	
Maximum output power	1438 W	
Max output current	105 A	
Ripple	3 A	
Leakage	0	
Maximum efficiency	44 %	
Initial voltage	13.3 V	
Direction		
Turn on speed	1480 rpm	
Motor power	3.3 kW	
Torque	8.5 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	14.5 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	50.2 s	
Three-phase voltage	406.1 V	

Connection definition		
Parameter	Value	Reference
Alternator system	B+B-	

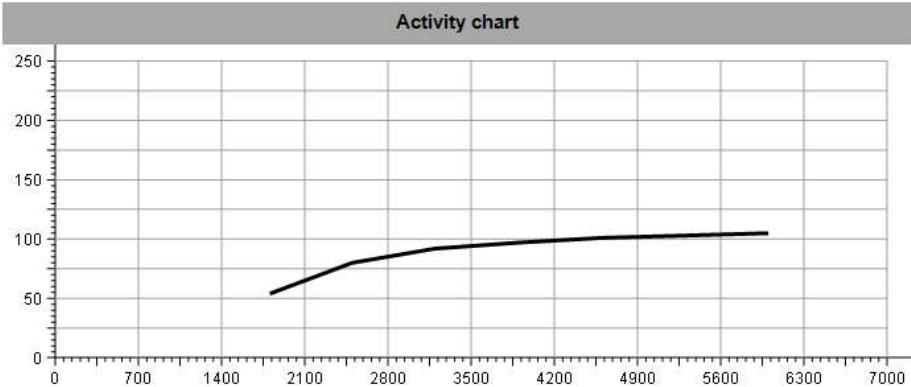

Data		
[RPM]	Current [A]	Reference [A]
6000	105	
5298	103	
4600	101	
3895	97	
3197	92	
2498	80	
1806	54	

ADDRESS	WEB	E-MAIL	PHONE