



Company name	WOSPerformance
Reference number	
Part	LMA275-HO (105A)
Manufacturer	WOSP
Nominal current [A]	105A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	61 A	
Maximum output power	1408 W	
Max output current	110 A	
Ripple	5 A	
Leakage	<5mA	
Maximum efficiency	40 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1007 rpm	
Motor power	3.5 kW	
Torque	10.3 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.9 V	
Status light RPM	298 rpm	
VSP @2,500	14.3 V	
VSP @4,250	14.3 V	
VSP @6,000	14.3 V	
Duration of the procedure	42.9 s	
Three-phase voltage	406.6 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

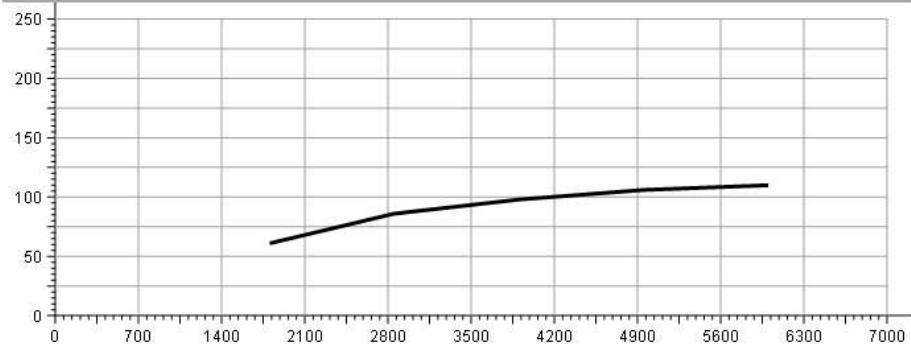

Data

[RPM]	Current [A]	Reference [A]
6000	110	
4953	106	
3909	98	
2851	86	
1804	61	