

Company name	WOSPerformance
Reference number	
Part	LMA276
Manufacturer	WOSP
Nominal current [A]	65A

**PASS**


### Test results table

Parameter	Value	Reference
Output at low revolutions	32 A	
Maximum output power	934 W	
Max output current	73 A	
Ripple	1 A	
Leakage	<5mA	
Maximum efficiency	35 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1258 rpm	
Motor power	2.7 kW	
Torque	6.9 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	14.9 V	
VSP @4,250	14.9 V	
VSP @6,000	14.9 V	
Duration of the procedure	41.2 s	
Three-phase voltage	407.8 V	

### Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

### Activity chart

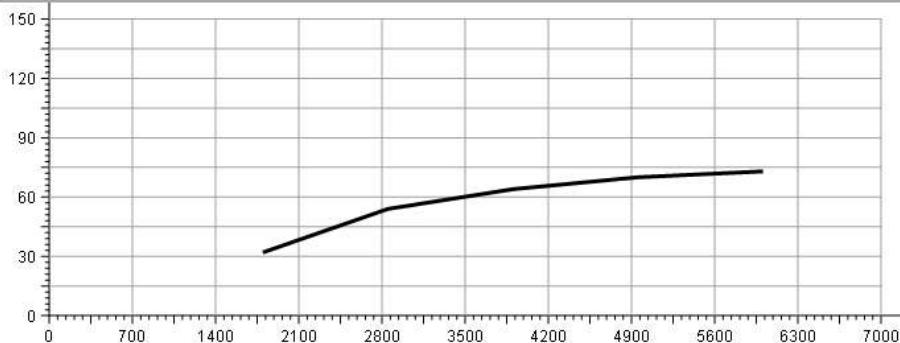

### Data

[RPM]	Current [A]	Reference [A]
6006	73	
4948	70	
3902	64	
2849	54	
1797	32	

ADDRESS

UK / USA

WEB

[www.wosperformance.com](http://www.wosperformance.com)

E-MAIL

UK: [info@wosperformance.co.uk](mailto:info@wosperformance.co.uk)

PHONE

USA: [info@wosperformance.com](mailto:info@wosperformance.com)