



Company name	
Reference number	
Part	LMA278-HO
Manufacturer	WOSP
Nominal current [A]	105


Test results table

Parameter	Value	Reference
Output at low revolutions	32 A	
Maximum output power	1455 W	
Max output current	107 A	
Ripple	4 A	
Leakage	0	
Maximum efficiency	39 %	
Initial voltage	13.3 V	
Direction	CW	
Turn on speed	1240 rpm	
Motor power	3.7 kW	
Torque	11.3 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.8 V	
Status light RPM	295 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.4 V	
VSP @6,000	14.4 V	
Duration of the procedure	51.6 s	
Three-phase voltage	414 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

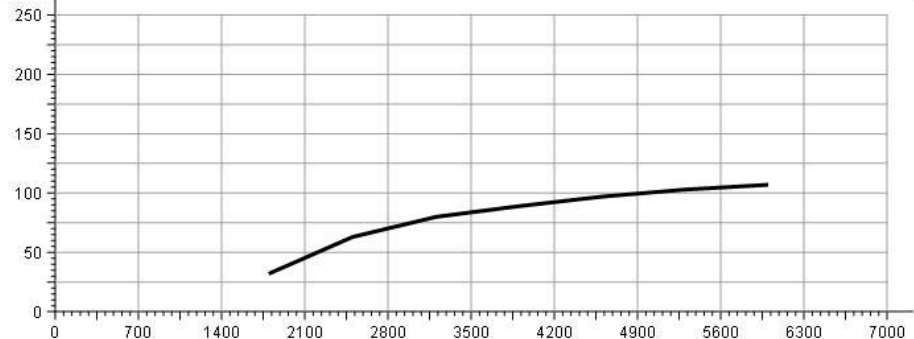

Data

[RPM]	Current [A]	Reference [A]
6000	107	
5305	103	
4600	97	
3905	89	
3207	80	
2502	63	
1796	32	

ADDRESS	WEB	E-MAIL	PHONE