

Company name	
Reference number	
Part	LMA300-HO
Manufacturer	WOSP
Nominal current [A]	170A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	151 A	
Maximum output power	2376 W	
Max output current	176 A	
Ripple	7 A	
Leakage	0	
Maximum efficiency	29 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1813 rpm	
Motor power	8.2 kW	
Torque	13.5 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	498 rpm	
VSP @2,500	0	
VSP @4,250	0	
VSP @6,000	14.6 V	
Duration of the procedure	48.6 s	
Three-phase voltage	411.7 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

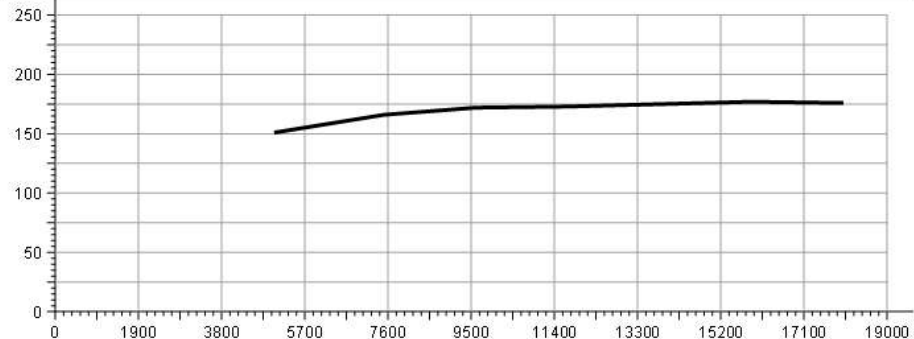

Data

[RPM]	Current [A]	Reference [A]
18003	176	
15898	177	
13800	175	
11698	173	
9600	172	
7502	166	
5000	151	