



Company name	WOSPerformance
Reference number	
Part	LMA308-LO
Manufacturer	WOSP
Nominal current [A]	120A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	92 A	
Maximum output power	1536 W	
Max output current	120 A	
Ripple	4 A	
Leakage	<5mA	
Maximum efficiency	44 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	924 rpm	
Motor power	3.5 kW	
Torque	9.1 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	289 rpm	
VSP @2,500	14.8 V	
VSP @4,250	14.8 V	
VSP @6,000	14.7 V	
Duration of the procedure	45.1 s	
Three-phase voltage	411.7 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

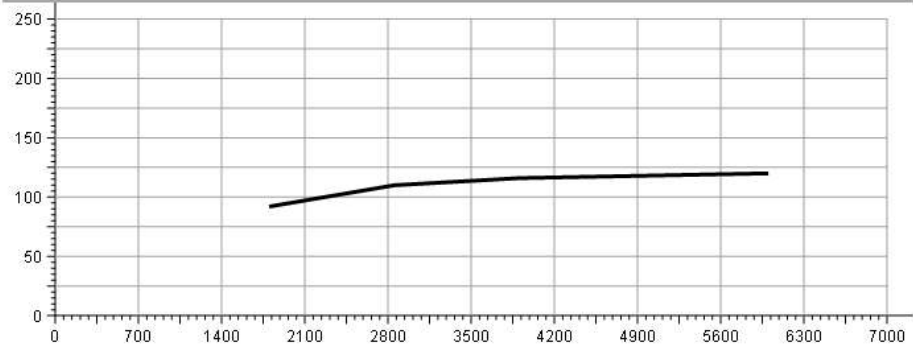

Data

[RPM]	Current [A]	Reference [A]
6000	120	
4946	118	
3905	116	
2854	110	
1800	92	