



Company name	WOSPerformance
Reference number	
Part	LMA318-HO
Manufacturer	WOSP
Nominal current [A]	390A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	322 A	
Maximum output power	4608 W	
Max output current	360 A	
Ripple	10 A	
Leakage	<5mA	
Maximum efficiency	27 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1773 rpm	
Motor power	16.9 kW	
Torque	28 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	0	
VSP @4,250	14.9 V	
VSP @6,000	14.8 V	
Duration of the procedure	54.6 s	
Three-phase voltage	403.8 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

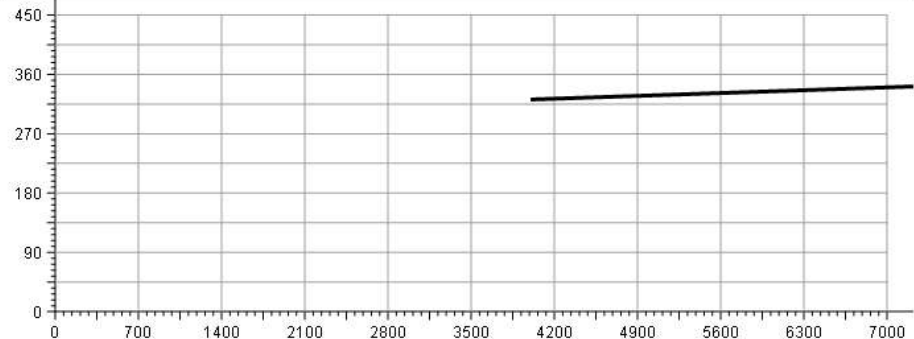

Data

[RPM]	Current [A]	Reference [A]
17993	360	
14830	356	
11693	353	
8550	350	
4000	322	