



Company name	
Reference number	LMA-324-SE
Part	LMA324-SE
Manufacturer	Worsp
Nominal current [A]	120

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	91 A	91 A
Maximum output power	1849 W	1642 W
Max output current	134 A	119 A
Ripple	4 A	3 A
Leakage	0	<5mA
Maximum efficiency	50 %	50 %
Initial voltage	13.4 V	13.3 V
Direction	CW	CW
Turn on speed	2849 rpm	2862 rpm
Motor power	3.7 kW	3 kW
Torque	9.5 Nm	8.5Nm
Rated voltage	12 V	12 V
Output Voltage Tested	13.6 V	13.6 V
Number of reached levels	5	5
Charge lamp voltage	0	0 V
Status light RPM	0	0 rpm
VSP @2,500	12.8 V	12.7 V
VSP @4,250	14.2 V	14.2 V
VSP @6,000	14.3 V	14.2 V
Duration of the procedure	52.6 s	51.7 s
Three-phase voltage	413.2 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	B+B-

Activity chart

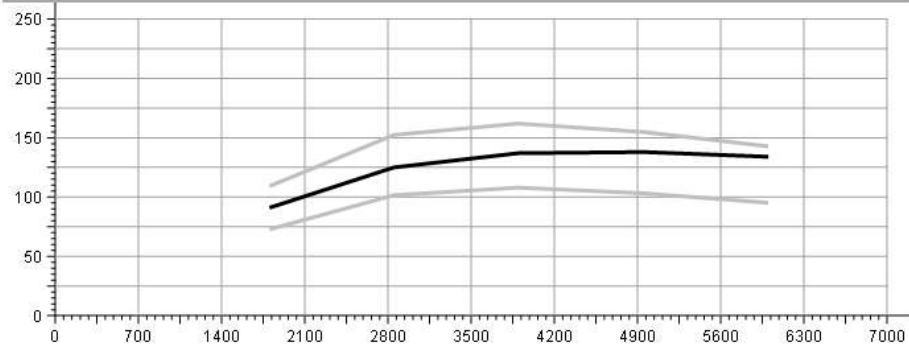

Data

[RPM]	Current [A]	Reference [A]
6000	134	119
4954	138	129
3895	137	135
2849	125	127
1803	91	91

ADDRESS	WEB	E-MAIL	PHONE