

Company name	
Reference number	
Part	LMA325-SE
Manufacturer	WOSP
Nominal current [A]	175


Test results table

Parameter	Value	Reference
Output at low revolutions	98 A	
Maximum output power	2390 W	
Max output current	177 A	
Ripple	3 A	
Leakage	0	
Maximum efficiency	49 %	
Initial voltage	13.2 V	
Direction	CW	
Turn on speed	3100 rpm	
Motor power	4.9 kW	
Torque	13.3 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	5	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	12.7 V	
VSP @4,250	14.3 V	
VSP @6,000	14.3 V	
Duration of the procedure	53.2 s	
Three-phase voltage	412.8 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

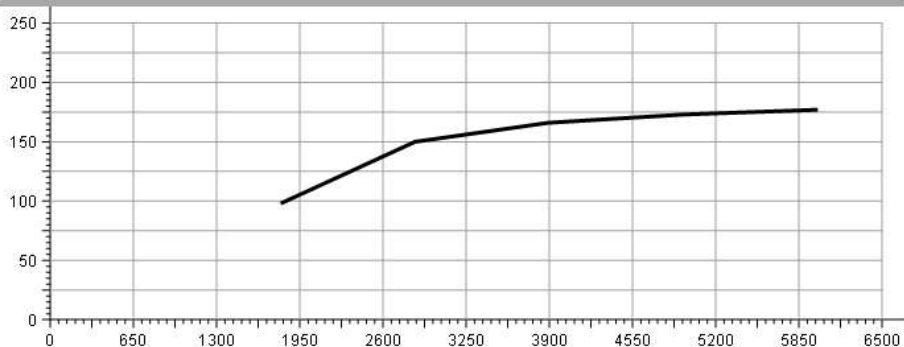

Data

[RPM]	Current [A]	Reference [A]
5997	177	
4950	173	
3893	166	
2850	150	
1800	98	

ADDRESS

WEB

E-MAIL

PHONE