



Company name	WOSPerformance
Reference number	
Part	LMA328
Manufacturer	WOSP
Nominal current [A]	175A

**PASS**


**Test results table**

Parameter	Value	Reference
Output at low revolutions	101 A	
Maximum output power	2227 W	
Max output current	174 A	
Ripple	5 A	
Leakage	<5mA	
Maximum efficiency	49 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1093 rpm	
Motor power	4.5 kW	
Torque	12.2 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	297 rpm	
VSP @2,500	14.7 V	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	45.7 s	
Three-phase voltage	405 V	

**Connection definition**

Parameter	Value	Reference
Alternator system	Lamp	

**Activity chart**

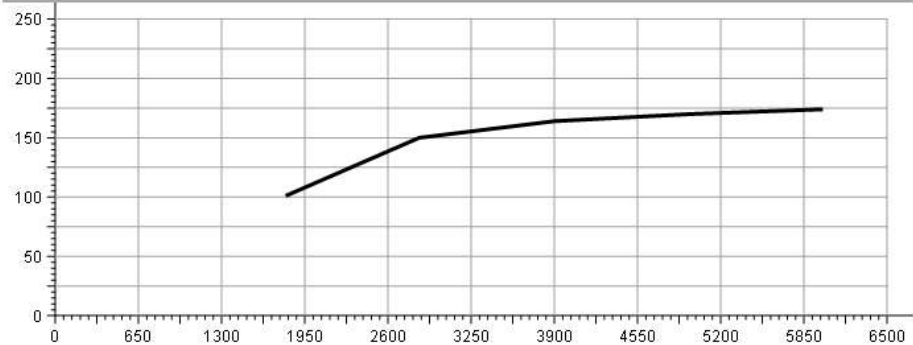

**Data**

[RPM]	Current [A]	Reference [A]
5997	174	
4960	170	
3900	164	
2843	150	
1800	101	