

Company name	WOSPerformance
Reference number	
Part	LMA333-LO
Manufacturer	WOSP
Nominal current [A]	120A

**PASS**


### Test results table

Parameter	Value	Reference
Output at low revolutions	87 A	
Maximum output power	1536 W	
Max output current	120 A	
Ripple	6 A	
Leakage	<5mA	
Maximum efficiency	44 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	1120 rpm	
Motor power	3.5 kW	
Torque	9.4 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	2 V	
Status light RPM	293 rpm	
VSP @2,500	14.7 V	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	45.1 s	
Three-phase voltage	406.2 V	

### Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

### Activity chart

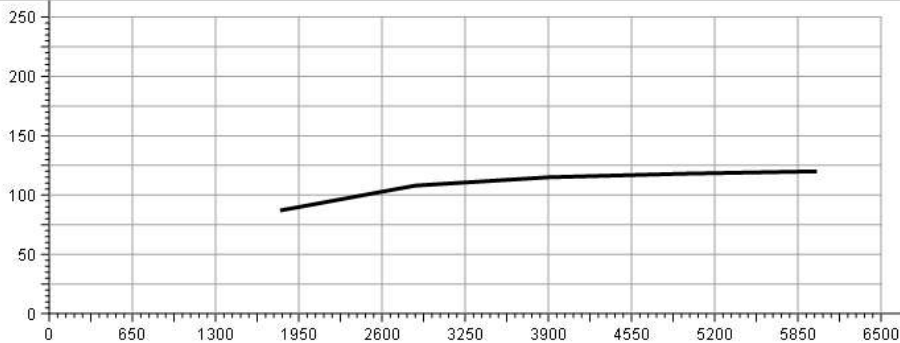

### Data

[RPM]	Current [A]	Reference [A]
5997	120	
4943	118	
3900	115	
2860	108	
1803	87	

ADDRESS

UK / USA

WEB

[www.wosperformance.com](http://www.wosperformance.com)

E-MAIL

UK: [info@wosperformance.co.uk](mailto:info@wosperformance.co.uk)

PHONE

USA: [info@wosperformance.com](mailto:info@wosperformance.com)