



Company name	WOSPerformance
Reference number	
Part	LMA337-HO
Manufacturer	WOSP
Nominal current [A]	320A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	255 A	
Maximum output power	4205 W	
Max output current	326 A	
Ripple	19 A	
Leakage	<5mA	
Maximum efficiency	35 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1711 rpm	
Motor power	12 kW	
Torque	19.5 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	517 rpm	
VSP @2,500	0	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	50.3 s	
Three-phase voltage	405.6 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

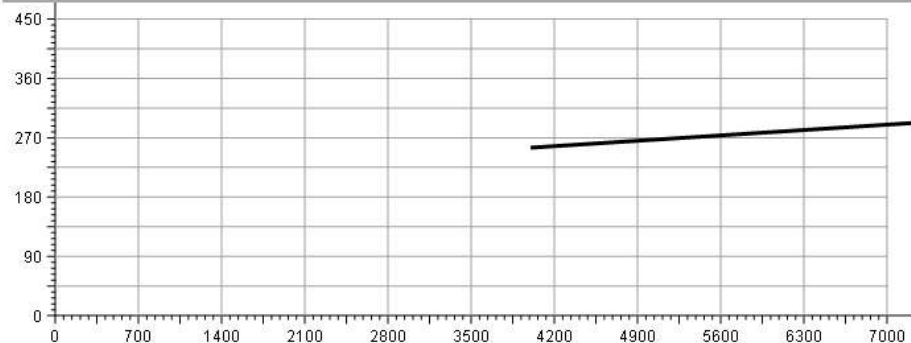

Data

[RPM]	Current [A]	Reference [A]
18000	326	
14840	322	
11692	316	
8548	308	
4000	255	