

Company name	WOSPerformance
Reference number	
Part	LMA338
Manufacturer	WOSP
Nominal current [A]	175A

**PASS**


### Test results table

Parameter	Value	Reference
Output at low revolutions	126 A	
Maximum output power	2253 W	
Max output current	176 A	
Ripple	5 A	
Leakage	<5mA	
Maximum efficiency	47 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	1614 rpm	
Motor power	4.8 kW	
Torque	11.4 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	291 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	47.5 s	
Three-phase voltage	414 V	

### Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

### Activity chart

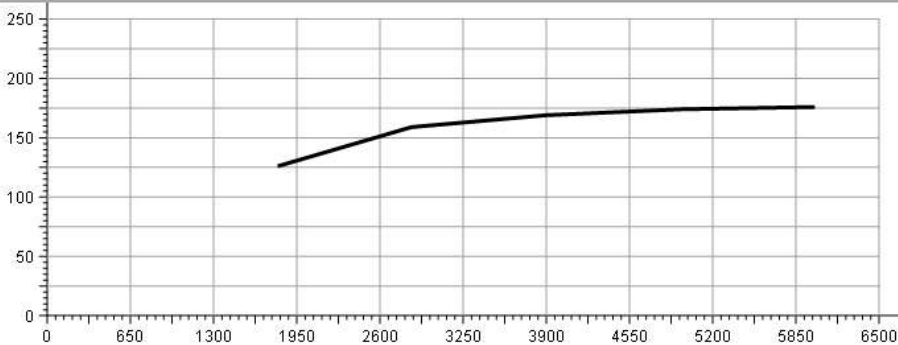

### Data

[RPM]	Current [A]	Reference [A]
5997	176	
4951	174	
3897	169	
2846	159	
1800	126	