

Company name	WOSPerformance
Reference number	
Part	LMA346
Manufacturer	WOSP
Nominal current [A]	95A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	54 A	
Maximum output power	1229 W	
Max output current	96 A	
Ripple	4 A	
Leakage	<5mA	
Maximum efficiency	40 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	1117 rpm	
Motor power	3.1 kW	
Torque	7.9 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	1.9 V	
Status light RPM	289 rpm	
VSP @2,500	14.7 V	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	45.5 s	
Three-phase voltage	408.4 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

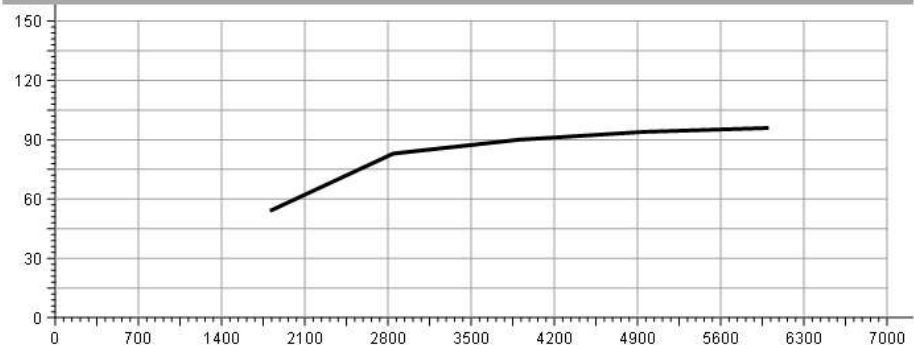

Data

[RPM]	Current [A]	Reference [A]
6003	96	
4951	94	
3898	90	
2843	83	
1806	54	