



Company name	WOSPerformance
Reference number	
Part	LMA351-HO
Manufacturer	WOSP
Nominal current [A]	170A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	138 A	
Maximum output power	2240 W	
Max output current	175 A	
Ripple	10 A	
Leakage	<5mA	
Maximum efficiency	29 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1737 rpm	
Motor power	7.8 kW	
Torque	12.7 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	510 rpm	
VSP @2,500	0	
VSP @4,250	14.6 V	
VSP @6,000	14.6 V	
Duration of the procedure	47.5 s	
Three-phase voltage	406.7 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

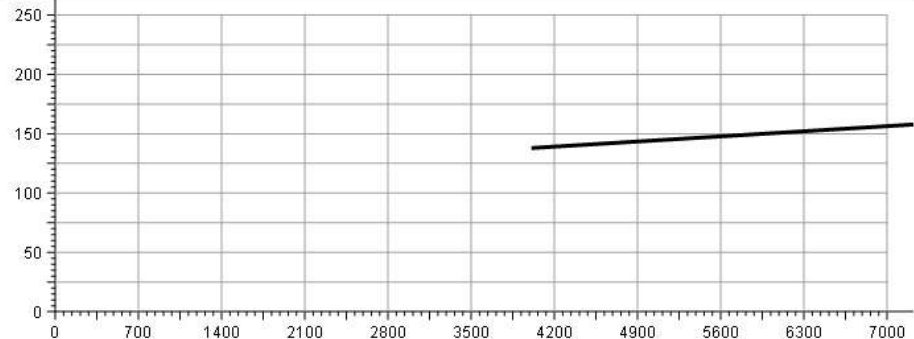

Data

[RPM]	Current [A]	Reference [A]
18000	175	
14847	173	
11700	170	
8550	166	
4007	138	