

Company name	
Reference number	
Part	LMA390-6PK-60
Manufacturer	WOSP
Nominal current [A]	240A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	145 A	
Maximum output power	3466 W	
Max output current	253 A	
Ripple	15 A	
Leakage	0	
Maximum efficiency	50 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	1243 rpm	
Motor power	6.9 kW	
Torque	18.6 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	290 rpm	
VSP @2,500	14.9 V	
VSP @4,250	14.9 V	
VSP @6,000	14.9 V	
Duration of the procedure	51.6 s	
Three-phase voltage	407.8 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

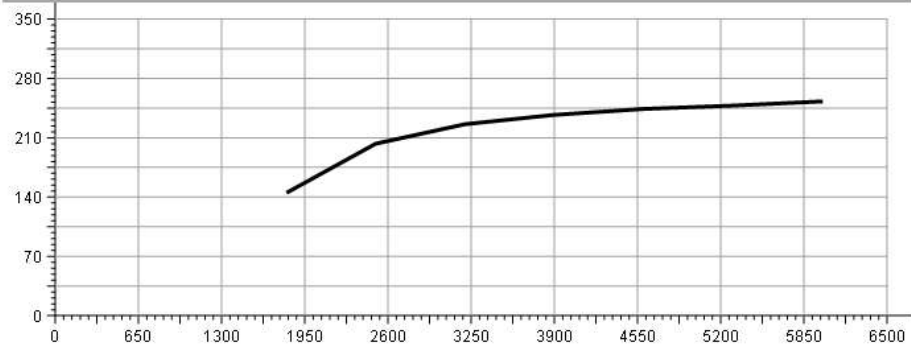

Data

[RPM]	Current [A]	Reference [A]
5997	253	
5297	248	
4597	244	
3897	237	
3200	226	
2503	203	
1807	145	