

Company name	WOSPerformance
Reference number	
Part	LMA396
Manufacturer	WOSP
Nominal current [A]	175

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	102 A	
Maximum output power	2376 W	
Max output current	176 A	
Ripple	5 A	
Leakage	0	
Maximum efficiency	52 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1044 rpm	
Motor power	4.6 kW	
Torque	12.3 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	292 rpm	
VSP @2,500	14.7 V	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	49.4 s	
Three-phase voltage	407.2 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

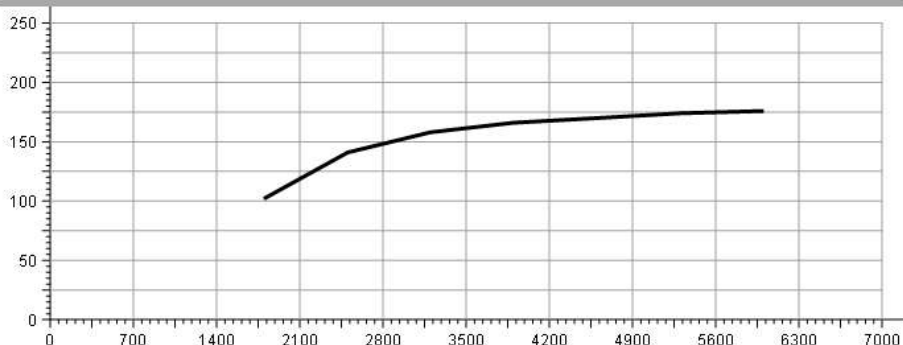

Data

[RPM]	Current [A]	Reference [A]
6003	176	
5298	174	
4603	170	
3895	166	
3197	158	
2502	141	
1797	102	

ADDRESS

WEB

E-MAIL

PHONE

www.wosperformance.co.uk

info@wosperformance.co.uk

info@wosperformance.com