MOTOPLAT CV

CV-623

30.11.2023 13:03:31

Company name	WOSPerformance
Reference number	
Part	LMA398-SE
Manufacturer	WOSP
Nominal current [A]	95A

PASS

Test results table

Parameter	Value	Reference
Output at low revolutions	52 A	
Maximum output power	1300 W	
Max output current	97 A	
Ripple	5 A	
Leakage	<5mA	
Maximum efficiency	43 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1843 rpm	
Motor power	3 kW	
Torque	8.3 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	15.3 V	
VSP @4,250	15.2 V	
VSP @6,000	15.2 V	
Duration of the procedure	56.1 s	
Three-phase voltage	411.7 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

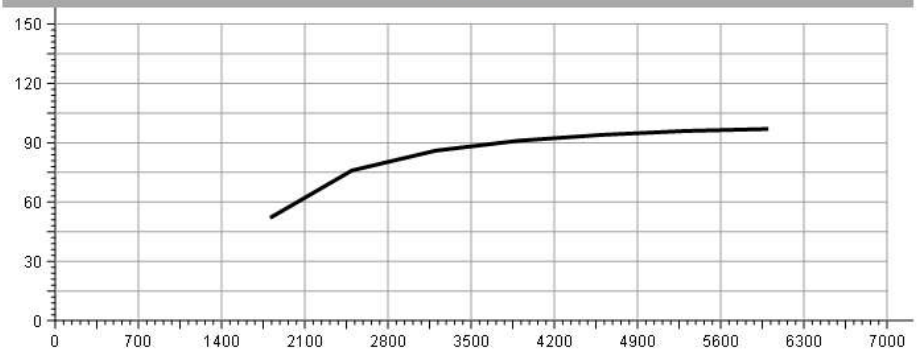

Data

[RPM]	Current [A]	Reference [A]
6000	97	
5303	96	
4597	94	
3893	91	
3200	86	
2497	76	
1807	52	

ADDRESS	WEB	E-MAIL	PHONE
UK / USA	www.wosperformance.com	UK: info@wosperformance.co.uk	USA: info@wosperformance.com