

Company name	WOSPerformance
Reference number	
Part	LMA421
Manufacturer	WOSP
Nominal current [A]	240A

**PASS**


### Test results table

Parameter	Value	Reference
Output at low revolutions	162 A	
Maximum output power	3301 W	
Max output current	252 A	
Ripple	12 A	
Leakage	<5mA	
Maximum efficiency	52 %	
Initial voltage	13 V	
Direction		
Turn on speed	1067 rpm	
Motor power	6.4 kW	
Torque	16.9 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	289 rpm	
VSP @2,500	14.6 V	
VSP @4,250	14.6 V	
VSP @6,000	14.6 V	
Duration of the procedure	48.8 s	
Three-phase voltage	408.3 V	

### Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

### Activity chart

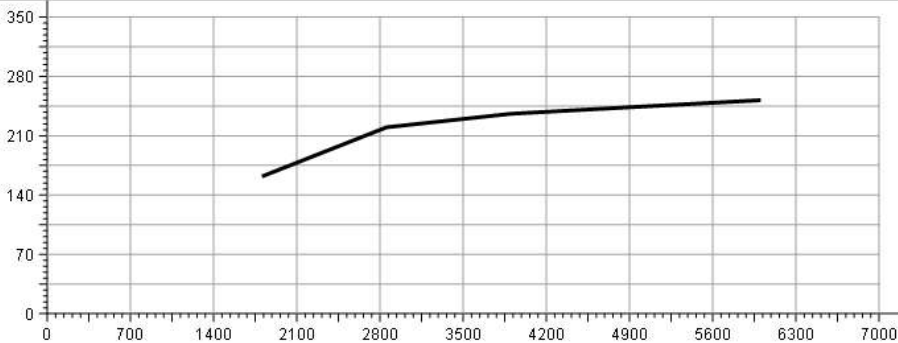

### Data

[RPM]	Current [A]	Reference [A]
6003	252	
4943	244	
3902	236	
2854	220	
1806	162	

ADDRESS

UK / USA

WEB

[www.wosperformance.com](http://www.wosperformance.com)

E-MAIL

UK: [info@wosperformance.co.uk](mailto:info@wosperformance.co.uk)

PHONE

USA: [info@wosperformance.com](mailto:info@wosperformance.com)