

Company name	WOSPerformance
Reference number	
Part	LMA468
Manufacturer	WOSP
Nominal current [A]	95A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	56 A	
Maximum output power	1356 W	
Max output current	99 A	
Ripple	1 A	
Leakage	<5mA	
Maximum efficiency	41 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1260 rpm	
Motor power	3.3 kW	
Torque	8.7 Nm	
Rated voltage		
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0.1 V	
Status light RPM	298 rpm	
VSP @2,500	14.8 V	
VSP @4,250	14.8 V	
VSP @6,000	14.8 V	
Duration of the procedure	56.8 s	
Three-phase voltage	406.7 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

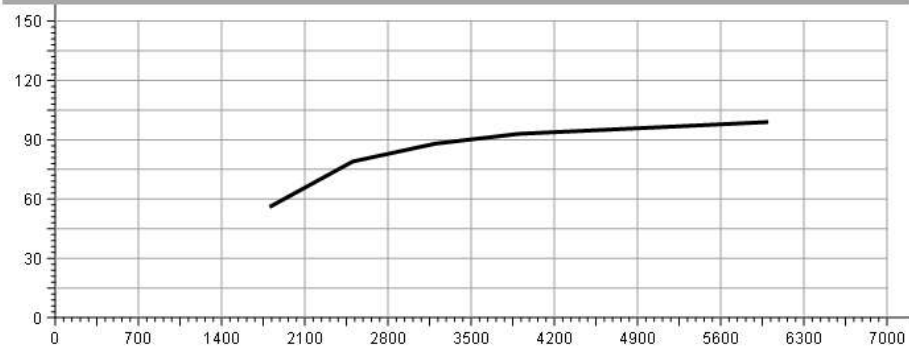

Data

[RPM]	Current [A]	Reference [A]
6000	99	
5308	97	
4600	95	
3902	93	
3194	88	
2502	79	
1803	56	