

Company name	
Reference number	
Part	LMA501
Manufacturer	WOSP
Nominal current [A]	170


Test results table

Parameter	Value	Reference
Output at low revolutions	109 A	
Maximum output power	2328 W	
Max output current	175 A	
Ripple	8 A	
Leakage	0	
Maximum efficiency	46 %	
Initial voltage	13.2 V	
Direction	CW	
Turn on speed	994 rpm	
Motor power	5.1 kW	
Torque	13.5 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.2 V	
Number of reached levels	7	
Charge lamp voltage	0.2 V	
Status light RPM	294 rpm	
VSP @2,500	14.4 V	
VSP @4,250	14.4 V	
VSP @6,000	14.4 V	
Duration of the procedure	47.3 s	
Three-phase voltage	410.1 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

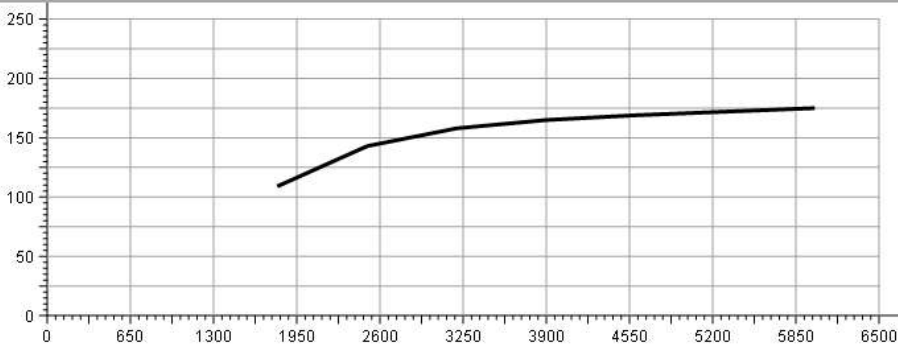

Data

[RPM]	Current [A]	Reference [A]
5997	175	
5294	172	
4600	169	
3900	165	
3200	158	
2500	143	
1797	109	

ADDRESS

WEB

E-MAIL

PHONE