

Company name	WOSPerformance
Reference number	
Part	LMA522
Manufacturer	WOSP
Nominal current [A]	240A

**PASS**


**Test results table**

Parameter	Value	Reference
Output at low revolutions	100 A	
Maximum output power	2803 W	
Max output current	219 A	
Ripple	6 A	
Leakage	<5mA	
Maximum efficiency	51 %	
Initial voltage	13.1 V	
Direction		
Turn on speed	1820 rpm	
Motor power	5.5 kW	
Torque	17.8 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	296 rpm	
VSP @2,500	14.5 V	
VSP @4,250	14.5 V	
VSP @6,000	14.5 V	
Duration of the procedure	52.2 s	
Three-phase voltage	407.3 V	

**Connection definition**

Parameter	Value	Reference
Alternator system	Lamp	

**Activity chart**

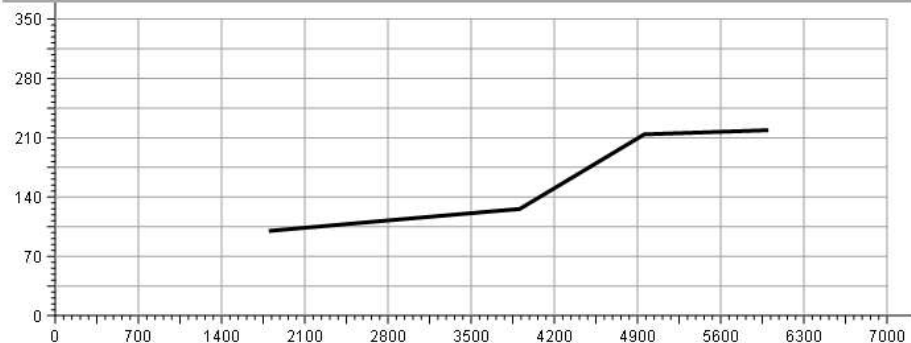

**Data**

[RPM]	Current [A]	Reference [A]
6000	219	
4956	214	
3908	126	
2844	113	
1796	100	