

Company name	
Reference number	
Part	LMA532-HO-'S'
Manufacturer	WOSP
Nominal current [A]	175


Test results table

Parameter	Value	Reference
Output at low revolutions	99 A	
Maximum output power	2385 W	
Max output current	178 A	
Ripple	7 A	
Leakage	0	
Maximum efficiency	51 %	
Initial voltage	13.3 V	
Direction	CW	
Turn on speed	3133 rpm	
Motor power	4.7 kW	
Torque	11.3 Nm	
Rated voltage	12 V	
Output Voltage Tested	13.6 V	
Number of reached levels	7	
Charge lamp voltage	0	
Status light RPM	0	
VSP @2,500	12.7 V	
VSP @4,250	14.2 V	
VSP @6,000	14.3 V	
Duration of the procedure	58.3 s	
Three-phase voltage	412.2 V	

Connection definition

Parameter	Value	Reference
Alternator system	B+B-	

Activity chart

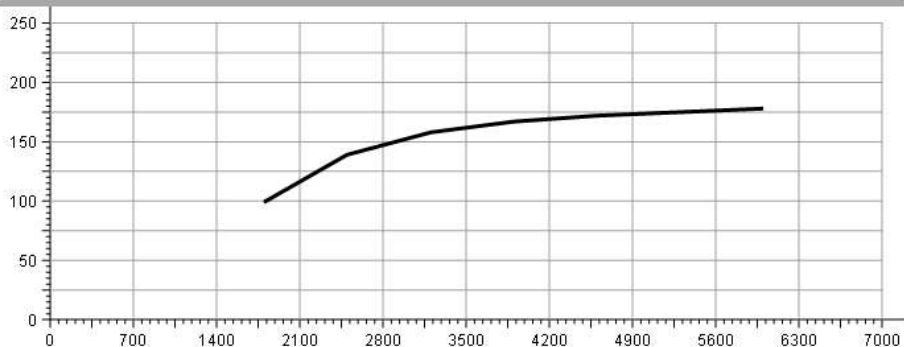

Data

[RPM]	Current [A]	Reference [A]
6000	178	
5304	175	
4600	172	
3899	167	
3203	158	
2496	139	
1797	99	

ADDRESS

WEB

E-MAIL

PHONE