



Company name	WOSPerformance
Reference number	
Part	LMA533
Manufacturer	WOSP
Nominal current [A]	95A

PASS


Test results table

Parameter	Value	Reference
Output at low revolutions	55 A	
Maximum output power	1229 W	
Max output current	96 A	
Ripple	5 A	
Leakage	<5mA	
Maximum efficiency	42 %	
Initial voltage	13.2 V	
Direction		
Turn on speed	1287 rpm	
Motor power	2.9 kW	
Torque	9 Nm	
Rated voltage		
Output Voltage Tested	13 V	
Number of reached levels	5	
Charge lamp voltage	0.1 V	
Status light RPM	294 rpm	
VSP @2,500	14.7 V	
VSP @4,250	14.7 V	
VSP @6,000	14.7 V	
Duration of the procedure	42.5 s	
Three-phase voltage	413.4 V	

Connection definition

Parameter	Value	Reference
Alternator system	Lamp	

Activity chart

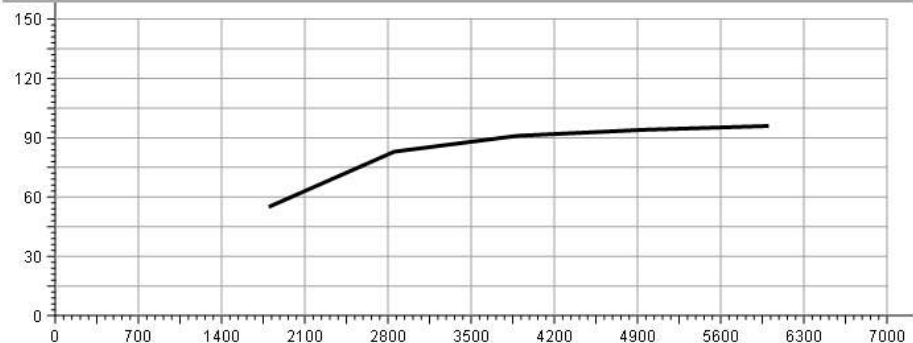

Data

[RPM]	Current [A]	Reference [A]
6004	96	
4947	94	
3891	91	
2853	83	
1796	55	